
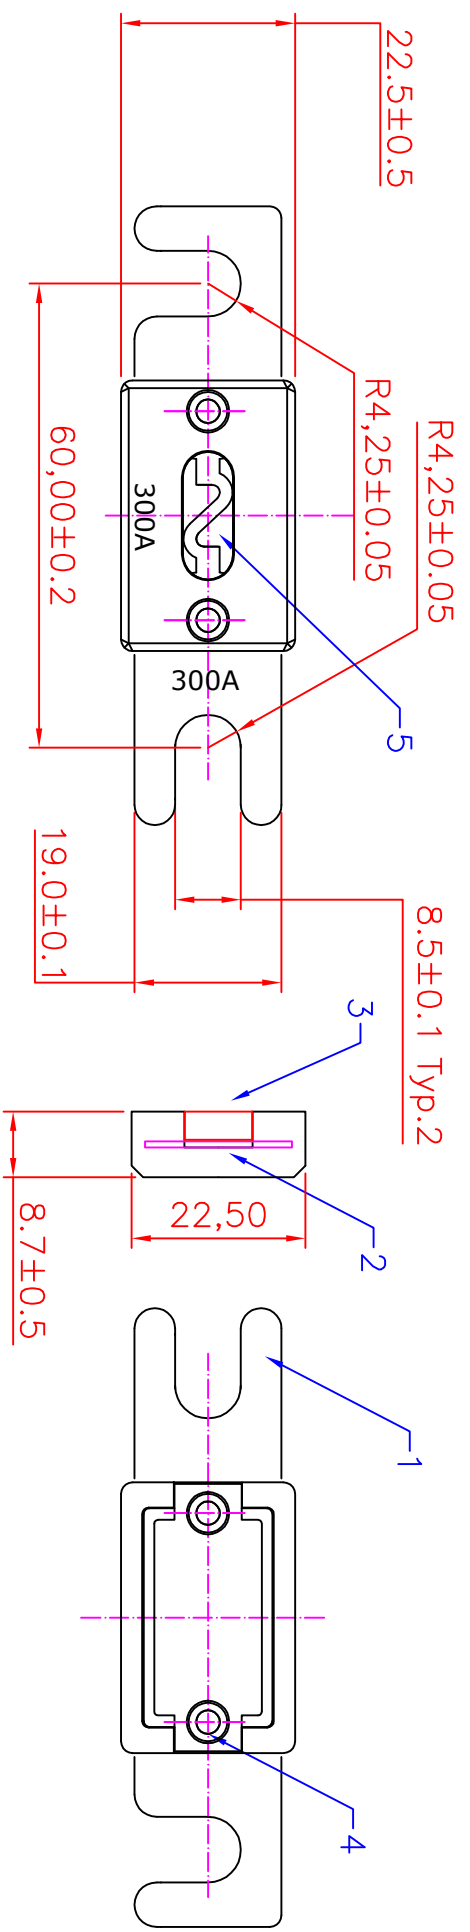


DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

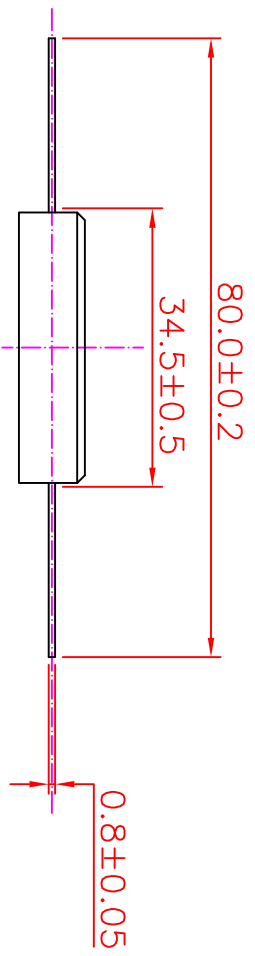

DONGGUAN TIANKUI ELECTRONIC CO.,LTD.

Fasten Fuse

FOR ANL-C

CUSTOMER

ITEM	P/N	DESCRIPTION	QTY	Material	REMARKS
5	CC-8123-N	Transparent cover	1	IS-3PC	transparent
4	CC-8122-N	Connector	2	Brass copper	Natural
3	PB-8121-N	PLASTIC COVER	1	Ceramic	White
2	PB-8122-N	PLASTIC BASE	1	Ceramic	White
1	TC-8122-N	TERMINAL CONTACT	1	Alloy	golden color/Ni Plated

UNLESS OTHERWISE STATED				
WALL THICKNESS	MM	MM	MM	
LINEAR	.XX	±0.05	MM	
ANGULAR	.XXX	±0.5	DEG	
DRAFT ANGLE/SIDE		0.5	°MAX	
BURR & FLASH		0.10	MAX	
BREAK CORNERS		0.20	R MAX	
PARTING LINE MISMATCH		0.05	MAX	
DSGN	Tommy Qiu	07-12-08	SCALE	free
DFTS	Tommy Qiu	07-12-08	SHEET	1 OF 3
CHKD			PART NO.	
SEE THE LIST				REV
				A

1

2

3

4

5

6

7

8

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-011	ORIGINAL RELEASE		

F

NOTES: UNLESS OTHERWISE SPECIFIED.

1. the fuses shown are for in motor vehicles, boats and trailers to protect electrical wiring and vehicles. This standard is for the construction shown and is not intended to restrict the design and use of other configurations and materials capable of meeting the vehicle requirements.

2. A fuse is a device designed to interrupt the electrical circuit when subjected to overcents. This action is to be nonreversible and the fuse is intended to be replaced after the circuit, malfunction has been corrected.

capable of meeting the vehicle requirements.

3. Functional Characteristics

TESTING CURRENT	BLOW TIME LIMIT
150% (Rating <225A)	1Hr. minimum
160% (Rating >225A)	6seconds minimum
220%	60seconds Max
250%	0.8sec-10sec
400%	0.2sec-2sec

4. Standard: DIN43560/1;

B

18	80VDC	500A	ANL-C-500
17	80VDC	400A	ANL-C-400
16	80VDC	350A	ANL-C-350
15	80VDC	300A	ANL-C-300
14	80VDC	250A	ANL-C-250
13	80VDC	200A	ANL-C-200
12	80VDC	175A	ANL-C-175
11	80VDC	150A	ANL-C-150
10	80VDC	125A	ANL-C-125
9	80VDC	100A	ANL-C-100
8	80VDC	80A	ANL-C-80
7	80VDC	70A	ANL-C-70
6	80VDC	60A	ANL-C-60
5	80VDC	50A	ANL-C-50
4	80VDC	40A	ANL-C-40
3	80VDC	35A	ANL-C-35
2	80VDC	30A	ANL-C-30
1	80VDC	20A	ANL-C-20
ITEM	Voltage rating	RATING	ASSEMBLY P/N

DONGGUAN TIARUI ELECTRONIC CO.,LTD.

Fasten Fuse

FOR ANL-C

CUSTOMER

UNLESS OTHERWISE STATED			
WALL THICKNESS	MM	MM	MM
LINEAR	.XX	±0.15	MM
	.XXX	±0.05	MM
ANGULAR	°	±0.5	DEG
DRAFT ANGLE/SIDE	0.5 °MAX		
BURR & FLASH	0.10	MAX	CHKD
BREAK CORNERS	0.20	R.MAX	APPD
PARTING LINE MISMATCH	0.05	MAX	

A

A

1

2

3

4

5

6

7

8