



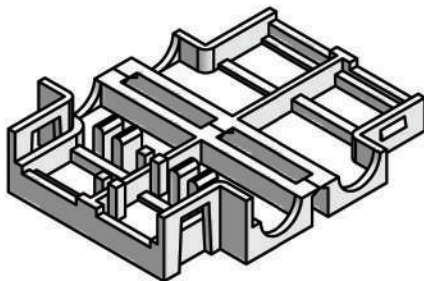

ATU IN-LINE FUSEHOLDER SPECIFICATIONS:

1. Electrical Rating: Max 30A 32V
2. Insulation Resistance At 500Vdc: Min. 100MΩ
3. Dielectric Strength: Min AC 2000V
4. Insulating Body: Nylon
5. Contacts: Brass
6. Applicable wire range: #14~#20

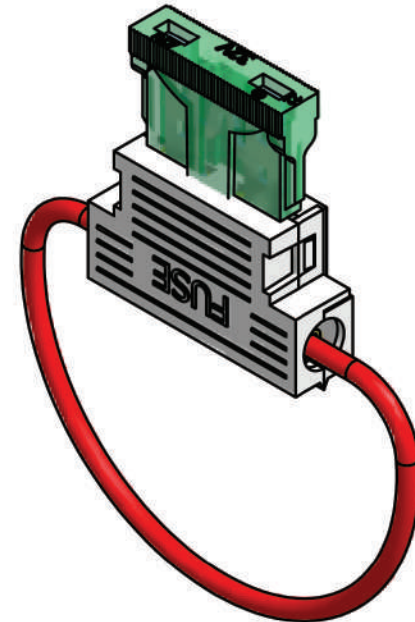

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM TOLERANCE DECIMALS ANGULAR X ± 0.5 ± 2° XX ± 0.25 DO NOT SCALE DRAWING		CUSTOMER NO.	DONGGUAN TIANRUI ELECTRONIC CO., LTD
		DRAWN BY	TITLE
 		CHECKED BY	ATU IN-LINE FUSE HOLEOR
		APPROVED BY	PART NO. SL-703S
P/N		DATE 2006/11/14	DRAWING NO. BA05100601
REV	1.0	SCALE	